

# Roller Chain Sprockets

## #25 Roller Chain Sprockets

P/N	Teeth	Pitch Dia.	Bore(Stock) (Max.)	Hub (Dia.)	(LTB)
25B09	9	0.731	1/4" 1/4"	19/32"*	0.485
25B10	10	0.809	1/4" 1/4"	9/16"	0.485
25B11	11	0.887	1/4" 5/16"	9/16"	0.485
25B12	12	0.966	5/16" 3/8"	11/16"	0.485
25B13	13	1.045	5/16" 7/16"	3/4"	0.185
25B14	14	1.123	5/16" 1/2"	3/4"	0.485
25B15	15	1.202	5/16" 1/2"	3/4"	0.485
25B16	16	1.281	5/16" 1/2"	13/16"	0.485
25B17	17	1.361	5/16" 1/2"	29/32"	0.485
25B18	18	1.140	3/8" 1/2"	1"	0.485
25B19	19	1.519	3/8" 1/2"	1-1/16"	0.485
25B20	20	1.598	3/8" 1/2"	1-5/32"	0.485
25B21	21	1.677	3/8" 1/2"	1-5/32"	0.485
25B22	22	1.757	3/8" 1/2"	1-5/32"	0.485
25B23	23	1.836	1/4" 1/2"	3/4"	0.610
25B24	24	1.915	3/8" 13/16"	1-7/32"	0.485
25B25	25	1.995	1/2" 1"	1-55/64"*	0.700
25B26	26	2.074	3/8" 13/16"	1-7/32"	0.485
25B27	27	2.153	1/2" 1"	2"*	0.700
25B28	28	2.233	1/2" 13/16"	1-7/32"	0.485
25B29	29	2.312	1/2" 1"	2"	0.700
25B30	30	2.392	3/8" 7/8"	1-9/32"	0.485
25B31	31	2.471	1/2" 1"	2"	0.700
25B32	32	2.551	1/2" 1"	2"	0.700
25B33	33	2.630	1/2" 1"	2"	0.700
25B34	34	2.709	1/2" 1"	2"	0.700
25B35	35	2.789	1/2" 1"	2"	0.700
25B36	36	2.868	1/2" 7/8"	1-3/8"	0.610
25B37	37	2.948	1/2" 1"	2"	0.700
25B38	38	3.027	1/2" 1"	2"	0.700
25B39	39	3.107	1/2" 1"	2"	0.700
25B40	40	3.186	1/2" 7/8"	1-3/3"	0.610
25B41	41	3.266	1/2" 1"	2"	0.700
25B42	42	3.345	1/2" 1"	2"	0.700
25B43	43	3.425	1/2" 1"	2"	0.700
25B44	44	3.504	1/2" 1"	2"	0.700
25B45	45	3.584	1/2" 1"	2"	0.700
25B46	46	3.663	1/2" 1"	2"	0.700
25B47	47	3.743	1/2" 1"	2"	0.700
25B48	48	3.822	1/2" 7/8"	1-3/8"	0.610
25B49	49	3.902	1/2" 1-1/2"	2"	0.750
25B50	50	3.981	1/2" 1-1/2"	2"	0.750
25B54	54	4.300	1/2" 7/8"	1-3/8"	0.610
25B60	60	4.777	1/2" 7/8"	1-3/8"	0.610



**NOTE!**  
1/4" Pitch  
Nominal Plate Thickness .110"

Power Plastics manufactures sprockets in a variety of engineering grade plastics to suit many applications. Polymer type sprockets can outperform premium steel sprockets in many harsh applications.

The most common material used for roller chain sprockets larger than #35 chain is UHMW-PE. With an excellent flexural modulus, UHMW-PE slightly deforms under load to evenly distribute the weight of the load among several teeth. This gives UHMW-PE sprockets the ability to handle good loads while increasing chain life.

Other advantages to polymer sprockets include the ability to withstand corrosive environments, reducing sounds levels and meeting FDA/USDA requirements.

Power Plastics can manufacture any type and size of sprocket. You are not limited to the specifications shown in the charts. If a larger hub is required, you need a special face thickness or any other modification, just let us know and we can easily make the change.

**We manufacture our sprockets as either A, B, or C hubs. When ordering an A or C hub, just replace the "B" in the part number to either an A or C.**


# Roller Chain Sprockets

## #35 Roller Chain Sprockets

P/N	Teeth	Pitch Dia.	Bore(Stock) (Max.)	Hub (Dia.)	(LTB)
35B08	8	0.980"	1/4" 3/8"	3/4"	0.668"
35B09	9	1.096"	3/8" 3/8"	5/8"	3/4"
35B10	10	1.214"	3/8" 7/16"	13/16"	3/4"
35B11	11	1.331"	3/8" 1/2"	7/8"	3/4"
35B12	12	1.449"	1/2" 9/16"	1"	3/4"
35B13	13	1.567"	1/4" 1/2"	3/4"	0.668"
35B14	14	1.685"	1/2" 3/4"	1-1/16"	3/4"
35B15	15	1.804"	1/2" 13/16"	1-3/8"	3/4"
35B16	16	1.922"	1/2" 15/16"	1-1/2"	3/4"
35B17	17	2.041"	1/2" 7/8"	1-27/32"*	3/4"
35B18	18	2.160"	1/2" 11/16"	1-1/4"	3/4"
35B19	19	2.278"	1/2" 1"	2"*	3/4"
35B20	20	2.397"	1/2" 1-3/16"	1-1/2"	7/8"
35B21	21	2.516"	1/2" 1"	2"	3/4"
35B22	22	2.635"	1/2" 1"	2"	3/4"
35B23	23	2.754"	1/2" 1"	2"	3/4"
35B24	24	2.873"	1/2" 1-3/16"	2"	7/8"
35B25	25	2.992"	1/2" 1"	2"	3/4"
35B26	26	3.111"	1/2" 1-7/16"	2-1/16"	7/8"
35B27	27	3.230"	1/2" 1"	2"	3/4"
35B28	28	3.349"	1/2" 1"	2"	3/4"
35B29	29	3.468"	1/2" 1"	2"	3/4"
35B30	30	3.588"	1/2" 1-7/16"	2-1/4"	7/8"
35B31	31	3.707"	1/2" 1"	2"	3/4"
35B32	32	3.826"	1/2" 1-1/2"	3"	7/8"
35B33	33	3.945"	1/2" 1-1/2"	3"	7/8"
35B34	34	4.064"	1/2" 1-1/2"	3"	7/8"
35B35	35	4.183"	1/2" 1-7/16"	2-1/4"	7/8"
35B36	36	4.303"	5/8" 1-7/16"	2-1/4"	7/8"
35B37	37	4.422"	1/2" 1-1/2"	3"	7/8"
35B38	38	4.541"	1/2" 1-1/2"	3"	7/8"
35B39	39	4.660"	1/2" 1-1/2"	3"	7/8"
35B40	40	4.780"	5/8" 1-3/4"	2-1/2"	7/8"
35B41	41	4.899"	1/2" 1-1/2"	3"	7/8"
35B42	42	5.018"	1/2" 1-1/2"	3"	7/8"
35B43	43	5.167"	12" 1-1/2"	3"	7/8"
35B44	44	5.257"	12" 1-1/2"	3"	7/8"
35B45	45	5.376"	5/8" 1-3/4"	2-3/4"	1"
35B46	46	5.495"	12" 1-1/2"	3"	7/8"
35B47	47	5.614"	12" 1-1/2"	3"	7/8"
35B48	48	5.734"	12" 1-1/2"	3"	7/8"



**NOTE!**  
3/8" Pitch  
Nominal Plate Thickness .168"

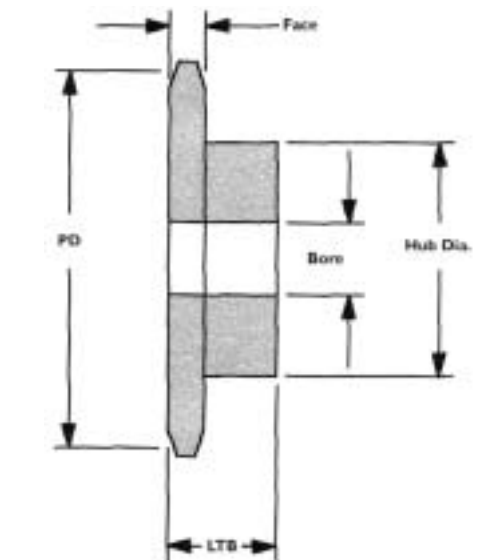

# Roller Chain Sprockets

## #40 Roller Chain Sprockets

P/N	Teeth	Pitch Dia.	Bore(Stock) (Max.)		Hub (Dia.)	(LTB)
40B08	8	1.307"	1/2"	1/2"	1"	7/8"
40B09	9	1.462"	1/2"	1/2"	1-1/16"	7/8"
40B10	10	1.618"	1/2"	1/2"	1-1/4"	7/8"
40B11	11	1.775"	1/2"	1/2"	1-3/8"	7/8"
40B12	12	1.932"	1/2"	5/8"	1-9/16"	7/8"
40B13	13	2.089"	1/2"	5/8"	1-9/16"	7/8"
40B14	14	2.247"	1/2"	3/4"	1-11/16"	7/8"
40B15	15	2.405"	1/2"	7/8"	1-13/16"	7/8"
40B16	16	2.563"	1/2"	15/16"	2"	7/8"
40B17	17	2.721"	1/2"	1"	2-1/8"	1"
40B18	18	2.879"	1/2"	1-1/8"	2-5/16"	1"
40B19	19	3.038"	1/2"	1-1/4"	2-1/2"	1"
40B20	20	3.196"	1/2"	1-1/4"	2-5/8"	1"
40B21	21	3.355"	1/2"	1-1/4"	2-3/4"	1"
40B22	22	3.513"	1/2"	1-3/8"	2-7/8"	1"
40B23	23	3.672"	1/2"	1-3/8"	3"	1"
40B24	24	3.831"	1/2"	1-1/2"	3-1/4"	1"
40B25	25	3.989"	1/2"	1-1/2"	3-1/4"	1"
40B26	26	4.148"	1/2"	1-1/2"	3-1/4"	1"
40B27	27	4.307"	1/2"	1-1/2"	3-1/4"	1"
40B28	28	4.466"	1/2"	1-1/2"	3-1/4"	1"
40B29	29	4.625"	1/2"	1-1/2"	3-1/4"	1"
40B30	30	4.783"	1/2"	1-1/2"	3-1/4"	1"
40B31	31	4.942"	1/2"	1-1/2"	3-1/4"	1"
40B32	32	5.101"	1/2"	1-1/2"	3-1/4"	1"
40B33	33	5.260"	1/2"	1-1/2"	3-1/4"	1"
40B34	34	5.419"	1/2"	1-1/2"	3-1/4"	1"
40B35	35	5.578"	1/2"	1-1/2"	3-1/4"	1"
40B36	36	5.737"	1/2"	1-1/2"	3-1/4"	1"
40B37	37	5.896"	1/2"	1-1/2"	3-1/4"	1"
40B38	38	6.055"	1/2"	1-1/2"	3-1/4"	1"
40B39	39	6.214"	1"	1"	3-1/4"	1"
40B40	40	6.373"	1"	1"	3-1/2"	1-1/8"
40B41	41	6.532"	1"	1"	3-1/2"	1-1/8"
40B42	42	6.691"	1"	1"	3-1/2"	1-1/8"
40B43	43	6.850"	1"	1"	3-1/2"	1-1/8"
40B44	44	7.009"	1"	1"	3-1/2"	1-1/8"
40B45	45	7.168"	1"	1"	3-1/2"	1-1/8"
40B46	46	7.327"	1"	1"	3-1/2"	1-1/8"
40B47	47	7.486"	1"	1"	3-1/2"	1-1/8"
40B48	48	7.645"	1"	1"	3-1/2"	1-1/8"



**NOTE!**  
1/2" Pitch  
Nominal Plate Thickness .284"

Power Plastics manufactures sprockets in a variety of engineering grade plastics to suit many applications. Polymer type sprockets can outperform premium steel sprockets in many harsh applications.

The most common material used for roller chain sprockets larger than #35 chain is UHMW-PE. With an excellent flexural modulus, UHMW-PE slightly deforms under load to evenly distribute the weight of the load among several teeth. This gives UHMW-PE sprockets the ability to handle good loads while increasing chain life.

Other advantages to polymer sprockets include the ability to withstand corrosive environments, reducing sounds levels and meeting FDA/USDA requirements.

Power Plastics can manufacture any type and size of sprocket. You are not limited to the specifications shown in the charts. If a larger hub is required, you need a special face thickness or any other modification, just let us know and we can easily make the change.

**We manufacture our sprockets as either A, B, or C hubs. When ordering and A or C hub, just replace the "B" in the part number to either A or C.**


# Roller Chain Sprockets

## #50 Roller Chain Sprockets

P/N	Teeth	Pitch Dia.	Bore(Stock) (Max.)		Hub (Dia.)	(LTB)
50B08	9	1.827"	1/2"	5/8"	1-3/8"	1"
50B10	10	2.023"	1/2"	3/4"	1-9/16"	1"
50B11	11	2.218"	1/2"	7/8"	1-3/4"	1"
50B12	12	2.415"	1/2"	1"	1-63/64"	1"
50B13	13	2.612"	1/2"	7/8"	1-7/8"	1"
50B14	14	2.803"	1/2"	1"	2-1/8"	1"
50B15	15	3.006"	1/2"	1-1/4"	2-3/8"	1"
50B16	16	3.204"	1/2"	1-1/4"	2-1/2"	1"
50B17	17	3.401"	1/2"	1-3/8"	2-11/16"	1"
50B18	18	3.599"	1/2"	1-1/2"	2-7/8"	1"
50B19	19	3.797"	1/2"	1-5/8"	3"	1"
50B20	20	3.995"	1/2"	1-5/8"	3"	1"
50B21	21	4.193"	1/2"	1-5/8"	3"	1"
50B22	22	4.392"	1/2"	1-5/8"	3"	1"
50B23	23	4.590"	1/2"	1-5/8"	3"	1"
50B24	24	4.788"	1/2"	1-5/8"	3"	1"
50B25	25	4.987"	1/2"	1-5/8"	3"	1"
50B26	26	5.185"	1/2"	1-5/8"	3"	1"
50B27	27	5.384"	1/2"	1-5/8"	3"	1"
50B28	28	5.582"	1/2"	1-5/8"	3"	1"
50B29	29	5.781"	1/2"	1-5/8"	3"	1"
50B30	30	5.979"	1/2"	1-3/4"	3-1/4"	1-1/4"
50B31	31	6.178"	1/2"	1-3/4"	3-1/4"	1-1/4"
50B32	32	6.376"	1/2"	1-3/4"	3-1/4"	1-1/4"
50B33	33	6.575"	1/2"	1-3/4"	3-1/4"	1-1/4"
50B34	34	6.774"	1/2"	1-3/4"	3-1/4"	1-1/4"
50B35	35	6.972"	1/2"	1-3/4"	3-1/4"	1-1/4"
50B36	36	7.171"	1/2"	1-3/4"	3-1/4"	1-1/4"
50B37	37	7.370"	1/2"	1-3/4"	3-1/4"	1-1/4"
50B38	38	7.568"	1/2"	1-3/4"	3-1/4"	1-1/4"
50B39	39	7.767"	1/2"	1-3/4"	3-1/4"	1-1/4"
50B40	40	7.966"	3/4"	2"	3-1/2"	1-1/4"
50B41	41	8.165"	3/4"	2"	3-1/2"	1-1/4"
50B42	42	8.363"	3/4"	2"	3-1/2"	1-1/4"
50B43	43	8.562"	3/4"	2"	3-1/2"	1-1/4"
50B44	44	8.761"	3/4"	2"	3-1/2"	1-1/4"
50B45	45	8.960"	3/4"	2-3/8"	4"	1-1/4"
50B46	46	9.159"	3/4"	2-3/8"	4"	1-1/4"
50B47	47	9.357"	3/4"	2-3/8"	4"	1-1/4"
50B48	48	9.556"	3/4"	2-3/8"	4"	1-1/4"



**NOTE!**  
5/8" Pitch  
Nominal Plate Thickness .343"

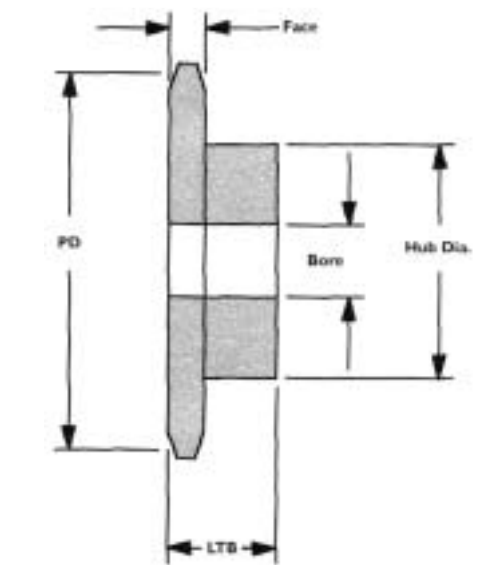

# Roller Chain Sprockets

## #60 Roller Chain Sprockets

P/N	Teeth	Pitch Dia.	Bore(Stock) (Max.)		Hub (Dia.)	(LTB)
60B08	8	1.960"	1/2"	5/8"	1-1/2"*	1-1/4"
60B09	9	2.193"	1/2"	7/8"	1-1/2"*	1-1/4"
60B10	10	2.427"	1/2"	1"	1-1/2"	1-1/4"
60B11	11	2.662"	3/4"	1"	2"*	1-1/4"
60B12	12	2.898"	3/4"	1"	2"	1-1/4"
60B13	13	3.134"	3/4"	1"	2-5/16"	1-1/4"
60B14	14	3.370"	3/4"	1"	2-1/2"	1-1/4"
60B15	15	3.607"	3/4"	1"	2-7/8"	1-1/4"
60B16	16	3.844"	3/4"	1"	3"	1-1/4"
60B17	17	4.082"	1"	2"	3-1/4"	1-1/4"
60B18	18	4.319"	1"	2"	3-1/2"	1-1/4"
60B19	19	4.557"	1"	2"	3-1/2"	1-1/4"
60B20	20	4.794"	1"	2"	3-7/8"	1-1/4"
60B21	21	5.032"	1"	2"	4"	1-1/4"
60B22	22	5.270"	1"	2"	4"	1-1/4"
60B23	23	5.508"	1"	2"	4"	1-1/4"
60B24	24	5.746"	1"	2"	4"	1-1/4"
60B25	25	5.984"	1"	2"	4"	1-1/4"
60B26	26	6.222"	1"	2-1/2"	4"	1-1/4"
60B27	27	6.460"	1"	2-1/2"	4"	1-1/4"
60B28	28	6.699"	1"	2-1/2"	4"	1-1/4"
60B29	29	6.937"	1"	2-1/2"	4"	1-1/4"
60B30	30	7.175"	1"	2-1/2"	4"	1-1/4"
60B31	31	7.413"	1"	2-1/2"	4"	1-1/4"
60B32	32	7.652"	1"	2-1/2"	4"	1-1/4"
60B33	33	7.890"	1"	2-1/2"	4"	1-1/4"
60B34	34	8.128"	1"	3"	4-1/2"	1-1/4"
60B35	35	8.367"	1"	3"	4-1/2"	1-1/4"
60B36	36	8.605"	1"	3"	4-1/2"	1-1/4"
60B37	37	8.844"	1"	3"	4-1/2"	1-1/4"
60B38	38	9.082"	1"	3"	4-1/2"	1-1/4"
60B39	39	9.321"	1"	3"	4-1/2"	1-1/4"
60B40	40	9.559"	1"	3"	4-1/2"	1-1/4"
60B41	41	9.798"	1"	3"	4-1/2"	1-1/4"
60B42	42	10.036"	1"	3-1/2"	5"	1-1/4"
60B43	43	10.275"	1"	3-1/2"	5"	1-1/4"
60B44	44	10.513"	1"	3-1/2"	5"	1-1/4"
60B45	45	10.752"	1"	3-1/2"	5"	1-1/4"
60B46	46	10.990"	1"	3-1/2"	5"	1-1/4"
60B47	47	11.229"	1"	3-1/2"	5"	1-1/4"
60B48	48	11.467"	1"	3-1/2"	5"	1-1/4"
60B49	49	11.706"	1"	3-1/2"	5"	1-1/4"
60B50	50	11.944"	1"	3-1/2"	5"	1-1/4"



**NOTE!**  
3/4" Pitch  
Nominal Plate Thickness .459"

Power Plastics manufactures sprockets in a variety of engineering grade plastics to suit many applications. Polymer type sprockets can outperform premium steel sprockets in many harsh applications.

The most common material used for roller chain sprockets larger than #35 chain is UHMW-PE. With an excellent flexural modulus, UHMW-PE slightly deforms under load to evenly distribute the weight of the load among several teeth. This gives UHMW-PE sprockets the ability to handle good loads while increasing chain life.

Other advantages to polymer sprockets include the ability to withstand corrosive environments, reducing sounds levels and meeting FDA/USDA requirements.

Power Plastics can manufacture any type and size of sprocket. You are not limited to the specifications shown in the charts. If a larger hub is required, you need a special face thickness or any other modification, just let us know and we can easily make the change.

**We manufacture our sprockets as either A, B, or C hubs. When ordering and A or C hub, just replace the "B" in the part number to either and A or C.**


# Roller Chain Sprockets

## #80 Roller Chain Sprockets

P/N	Teeth	Pitch Dia.	Bore(Stock) (Max.)		Hub (Dia.)	(LTB)
80B08	8	2.613"	3/4"	1"	2"*	1-1/2"
80B09	9	2.924"	3/4"	1"	2"*	1-1/2"
80B10	10	3.236"	3/4"	1"	2"	1-1/2"
80B11	11	3.549"	3/4"	1"	2"	1-1/2"
80B12	12	3.864"	3/4"	1"	2"	1-1/2"
80B13	13	4.179"	1"	2"	3-1/4"	1-1/2"
80B14	14	4.494"	1"	2"	3-1/4"	1-1/2"
80B15	15	4.810"	1"	2"	3-1/4"	1-1/2"
80B16	16	5.126"	1"	2"	3-1/4"	1-1/2"
80B17	17	5.442"	1"	2"	3-1/4"	1-1/2"
80B18	18	5.759"	1"	2"	3-1/4"	1-1/2"
80B19	19	6.076"	1"	2-1/2"	4"	1-1/2"
80B20	20	6.392"	1"	2-1/2"	4"	1-1/2"
80B21	21	6.710"	1"	2-1/2"	4"	1-3/4"
80B22	22	7.027"	1"	2-1/2"	4"	1-3/4"
80B23	23	7.344"	1"	2-1/2"	4"	1-3/4"
80B24	24	7.661"	1"	2-1/2"	4"	1-3/4"
80B25	25	7.979"	1"	2-1/2"	4"	1-3/4"
80B26	26	8.296"	1"	3"	4-1/2"	2"
80B27	27	8.614"	1"	3"	4-1/2"	2"
80B28	28	8.931"	1"	3"	4-1/2"	2"
80B29	29	9.249"	1"	3"	4-1/2"	2"
80B30	30	9.567"	1"	3"	4-1/2"	2"
80B31	31	9.885"	1"	3"	4-1/2"	2"
80B32	32	10.202"	1"	3-1/2"	5"	2"
80B33	33	10.520"	1"	3-1/2"	5"	2"
80B34	34	10.838"	1"	3-1/2"	5"	2"
80B35	35	11.156"	1"	3-1/2"	5"	2"
80B36	36	11.156"	1"	3-1/2"	5"	2"
80B37	37	11.792"	1"	3-1/2"	5"	2"
80B38	38	12.110"	1"	4"	5-1/2"	2"
80B39	39	12.428"	1"	4"	5-1/2"	2"
80B40	40	12.746"	1"	4"	5-1/2"	2"
80B41	41	13.063"	1"	4"	5-1/2"	2"
80B42	42	13.382"	1"	4"	5-1/2"	2"
80B43	43	13.700"	1"	4"	5-1/2"	2"
80B44	44	14.018"	1"	4"	6"	2"
80B45	45	14.336"	1"	4"	6"	2"
80B46	46	14.654"	1"	4"	6"	2"
80B47	47	14.972"	1"	4"	6"	2"
80B48	48	15.290"	1"	4"	6"	2"
80B49	49	15.608"	1"	4"	6"	2"
80B50	50	15.926"	1"	4"	6"	2"



**NOTE!**  
1" Pitch  
Nominal Plate Thickness .575"

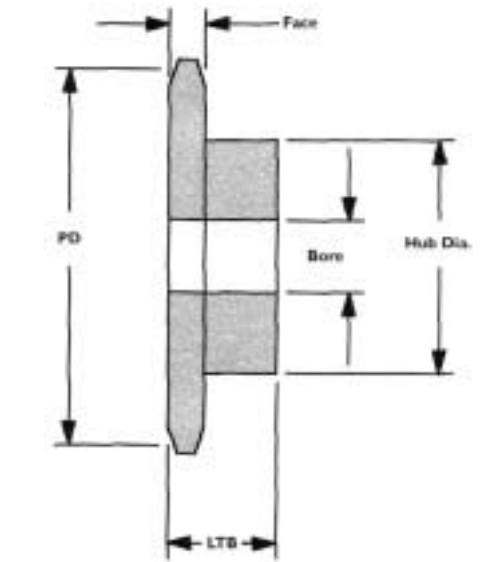

# Roller Chain Sprockets

## #100 Roller Chain Sprockets

P/N	Teeth	Pitch Dia.	Bore(Stock)	(Max.)	Hub (Dia.)	(LTB)
I00B08	8	3.266"	3/4"	1"	2"	1-3/4"
I00B09	9	3.655"	3/4"	1"	2"	1-3/4"
I00B10	10	4.045"	1"	2-1/4"	3-1/4"	1-3/4"
I00B11	11	4.437"	1"	2-1/4"	3-1/4"	1-3/4"
I00B12	12	4.830"	1"	2-1/4"	3-1/4"	1-3/4"
I00B13	13	5.223"	1"	2-1/4"	3-1/4"	1-3/4"
I00B14	14	5.617"	1"	2-1/4"	3-1/4"	1-3/4"
I00B15	15	6.012"	1"	2-1/2"	4"	1-3/4"
I00B16	16	6.407"	1"	2-1/2"	4"	1-3/4"
I00B17	17	6.803"	1"	2-1/2"	4"	1-3/4"
I00B18	18	7.198"	1"	2-1/2"	4"	1-3/4"
I00B19	19	7.594"	1"	2-1/2"	4"	2"
I00B20	20	7.991"	1"	2-1/2"	4"	2"
I00B21	21	8.387"	1"	3"	4-1/2"	2"
I00B22	22	8.783"	1/2"	3"	4-1/2"	2"
I00B23	23	9.180"	1/2"	3"	4-1/2"	2"
I00B24	24	9.577"	1/2"	3"	4-1/2"	2"
I00B25	25	9.973"	1/2"	3"	4-1/2"	2"
I00B26	26	10.370"	1/2"	3-1/2"	5"	2"
I00B27	27	10.767"	1/2"	3-1/2"	5"	2"
I00B28	28	11.164"	1/2"	3-1/2"	5"	2"
I00B29	29	11.561"	1/2"	3-1/2"	5"	2"
I00B30	30	11.958"	1/2"	3-1/2"	5"	2"
I00B31	31	12.356"	1/2"	4"	5-1/2"	2"
I00B32	32	12.753"	1/2"	4"	5-1/2"	2"
I00B33	33	13.150"	1/2"	4"	5-1/2"	2"
I00B34	34	13.547"	1/2"	4"	5-1/2"	2"
I00B35	35	13.945"	1/2"	4"	5-1/2"	2"
I00B36	36	14.342"	1"	4"	5-1/2"	2-1/2"
I00B37	37	14.740"	1"	4"	6"	2-1/2"
I00B38	38	15.137"	1"	4"	6"	2-1/2"
I00B39	39	15.534"	1"	4"	6"	2-1/2"
I00B40	40	15.932"	1"	4"	6"	2-1/2"
I00B41	41	16.329"	1"	4"	6"	2-1/2"
I00B42	42	16.727"	1"	4"	6"	2-1/2"
I00B43	43	17.124"	1"	4"	6"	2-1/2"
I00B44	44	17.522"	1"	4"	6"	2-1/2"
I00B45	45	17.919"	1"	4"	6"	2-1/2"
I00B46	46	18.317"	1"	4"	6"	2-1/2"
I00B47	47	18.715"	1"	4"	6"	2-1/2"
I00B48	48	19.112"	1"	4"	6"	2-1/2"
I00B49	49	19.510"	1"	4"	6"	2-1/2"
I00B50	50	19.907"	1"	4"	6"	2-1/2"



**NOTE!**  
 1-1/4" Pitch  
 Nominal Plate Thickness .692"

Power Plastics manufactures sprockets in a variety of engineering grade plastics to suit many applications. Polymer type sprockets can outperform premium steel sprockets in many harsh applications.

The most common material used for roller chain sprockets larger than #35 chain is UHMW-PE. With an excellent flexural modulus, UHMW-PE slightly deforms under load to evenly distribute the weight of the load among several teeth. This gives UHMW-PE sprockets the ability to handle good loads while increasing chain life.

Other advantages to polymer sprockets include the ability to withstand corrosive environments, reducing sounds levels and meeting FDA/USDA requirements.

Power Plastics can manufacture any type and size of sprocket. You are not limited to the specifications shown in the charts. If a larger hub is required, you need a special face thickness or any other modification, just let us know and we can easily make the change.

**We manufacture our sprockets as either A, B, or C hubs. When ordering and A or C hub, just replace the "B" in the part number to either A or C.**